

HORIZONTAL MAGNETIC LEVEL SWITCH

AI.LT204




DESCRIPTION

AI.LT204 float-operated level switches are suitable for controlling liquid level at horizontal mounting. The float equipped with an extended arm moves a couple magnetic mechanism to actuate a microswitch to offer an ON-OFF contact for application.

TECHNICAL DATA


- **Enclosure housing:** Weather proof IP65
- **Process connection:** 1 1/2" - 4" Flange type
- **Flange rating:** JIS, ANSI, DIN available
- **Material:** Wetted parts 316 stainless steel
- **Temperature Limits:** -20°C to +150°C
- **Pressure Limits:** 3.0 Mpa (30 kg/cm²), option: up to 4.5 Mpa
- **Switch function:** Micro switch 1 x SPDT; 2 x SPDT option
- **Switch rating:** 3A/250VAC, 5A/125VAC, 4A/30VDC
- **Conduit connection:** 1/2" NPT (F), option
- **Float working specific gravity:** ≥ 0.7 (option: less than 0.7 available on request)

DIMENSION

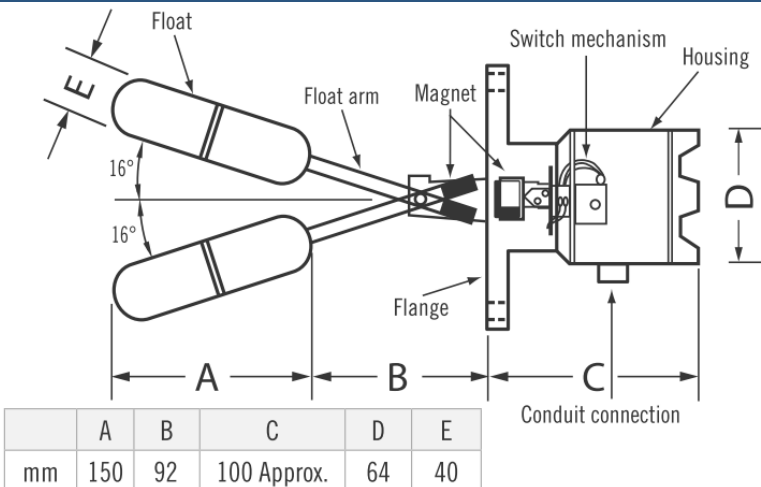

NOTE.
1. Special dimensions on request.
2. Extension length for B is available.

WIRE DRAWING



1 SPDT



2 SPDT

ORDERING INFORMATION

LT204	Code	Process Connection Size
		(1) 1 1/2" (2) 2" (3) 3" (4) 4"
	Code	Process Connection Rating
		(A) JIS 10K (B) JIS 20K (C) ANSI 150# (D) ANSI 300# (E) PN10 (F) PN25 (G) option
	Code	Flange Material
		(1) SS316 (2) SS304 (3) Option
	Code	Switch Function- Micro Switch
	1	One switch, SPDT x 1
	2	Two switch, SPDT x 2
LT204		Complete Ordering Code

Tel.: +39 011 198 218 39 - E-mail: info@asit-ge.com - www.asit-ge.com

Le caratteristiche dichiarate possono cambiare senza alcun preavviso



ASIT ITALIA S.R.L.

Sede operativa e Uffici
Via Quintino Sella, 6
10020 Riva presso Chieri (TO)
T (+39) 011 198 218 39 - F (+39) 011 198 371 06

INFO@ASIT-GE.COM

WWW.ASIT-GE.COM



Company with
Certificate of Quality
System ISO 9001:2015
Cert n°38785/19/S