


ASIT ITALIA

MONOSILICON PRESSURE TRANSMITTER

AI.EBAR.DPT

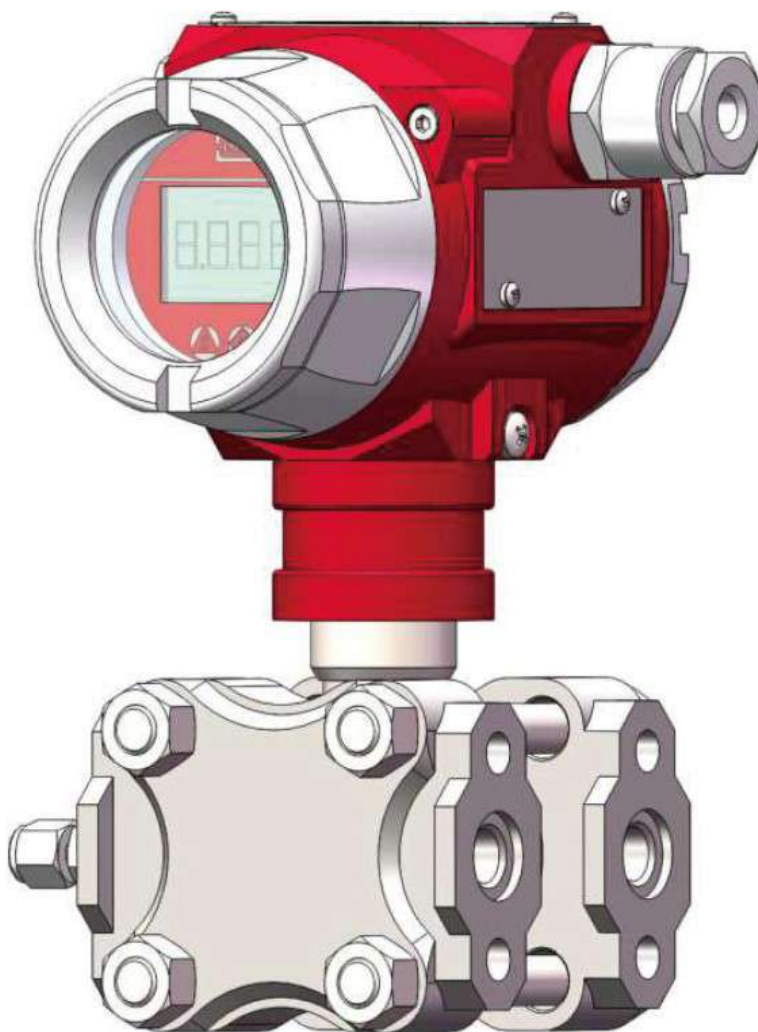

DESCRIPTION

AI.EBAR.DPT differential pressure transmitter with monosilicon sensor is typically used in process or environmental applications for continuous measurement of pressure differences in liquids, vapors and gases. With reliable ex-proof construction and electronics, suitable in EX areas.

MAIN PARAMETERS

- Pressure types: Differential pressure
- Measuring range: 200Pa-10Mpa, Please refer to the ordering information chapter
- Output signal: 4-20mA, 4-20mA+HART, Modbus-RTU/RS485 customer
- Reference accuracy: +/- 0.075% URL, optional +/- 0.05% URL

MEASURING MEDIUM

Liquid, gas, or steam flow as well as liquid level, density and pressure

MEASURING RANGE AND LIMIT

Nominal value	Smallest Calibratable span	Lower range limit (LRL)	Upper range limit (URL)	Static pressure limit	High pressure side overload limit	Low pressure side overload limit
6kPa	200Pa	-6kPa	6kPa	25MPa	25MPa	16MPa
40kPa	400Pa	-40kPa	40kPa	40MPa	25MPa	16Mpa
250kPa	2.5kPa	-250kPa	250kPa	40MPa	25MPa	16Mpa
1MPa	10kPa	-500kPa	1MPa	40MPa	25MPa	16MPa
3MPa	30kPa	-500kPa	3MPa	40MPa	25MPa	16Mpa
10MPa	100kPa	-500kPa	10MPa	40MPa	25Mpa	16Mpa

Adjust requirements: lower range value (LVR) and upper range value (URV) can be adjusted within the scope of the upper and lower range limit, when / URV >= LRV / , needs / URV >= smallest calibratable span when / URV <= LRV / , needs / LRV / >= smallest calibratable span

STANDARD SPECIFICATIONS AND REFERENCE CONDITIONS

Test standard: GB/T28474/IEC60770; zero based-calibration span, linear output, silicone oil filling, 316L stainless steel isolation diaphragm. 316L

STATIC PRESSURE EFFECTS

Effect on zero: +/- 0.15TD % URL/10MPa — Effect on full scale: +/- 0.2 % URL/10MPa

PERFORMANCE SPECIFICATIONS

The overall performance including but not limited to (Reference accuracy), (Enviroments temperature effects), (Static pressure effects) and other comprehensive error.

Typical accuracy: +/- 0.075% URL

Stability: +/- 0.2% URL/5 years

POWER SUPPLY EFFECTS

When power supply voltage is within 10.5/16.5-55VDC, zero and span change not more than +/-0.005% URL/V.

MOUNTING POSITION EFFECTS

Install error less than 400Pa, which can be corrected by PV=0 reset.

VIBRATION EFFECTS

According to IEC61298-3, <0.1% URL

OUTPUT SIGNAL

Two wire 4-20 mA output with digital communications, linear or square root output programmable, HART protocol is superimposed on the 4-20mA signal.

AMBIENT TEMPERATURE EFFECTS

Per 10°C change within the limits -20-80°C - +/- (0.1+0.015TD) % SPAN

REFERENCE ACCURACY

Including linearity, hysteresis and repeatability. calibration temperature: 20°C ± 5°C		
TD ≤10 (note 1)	±0.075%SPAN(note 2)	Nominal value 6kPa, 40kPa 250kPa, 1MPa 3MPa, 10MPa
10 < TD ≤ 100	±0.0075TD% SPAN	
Square root output accuracy is 1.5 times linear output accuracy		
Note 1: TD is Turn down, when URV ≥ LRV , TD=URL/ URV when URV ≤ LRV , TD=URL/ LRV		
Note 2: SPAN= URV-LRV		

TECHNICAL SPECIFICATIONS


DAMPING TIME

- Total damping time constant: equal to the sum of damping time of amplifier and sensor capsule.
- Damping time of amplifier: 0-100S adjustable
- Damping time of sensor capsule (isolation sensor diaphragm and silicon filling oil) ≤ 0.25
- Startup after power off: $\leq 150\text{ms}$

POWER SUPPLY

- Standard/flame proof: 10.5-55VDC
- HART protocol: 16.5-55VDC, communication load resistance 250Ω
- Modbus-RTU/RS485: 5-32VDC
- Load resistance: 0-2119 Ω for operation, 250-600 Ω for HART protocol
- Transmission distance: <1000 meters
- Power consumption: $\leq 500\text{mW}@24\text{VDC}$, 20.8mA

POWER SUPPLY AND LOAD REQUIREMENTS

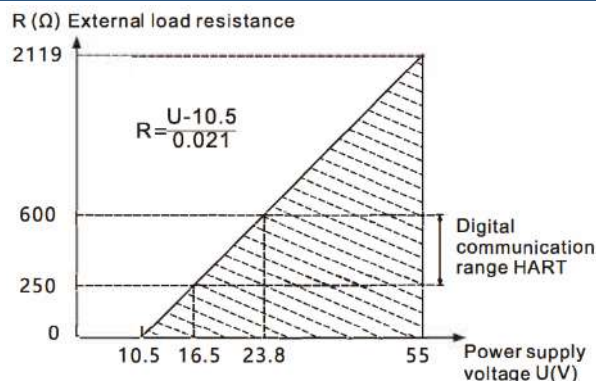

WEIGHT

Net weight: about 4 kg (without mounting bracket and process connection adaptor)

ENVIRONMENT CONDITION

Items	Operational condition	
Working temperature	-40-85°C, integrated LCD display :-20-70°C	
Storage temperature	-40-110°C, integrated LCD display :-40-85°C	
Media temperature	Silicone oil filling:-40-120°C	
	Inert oil filling:-40-85°C	
Working humidity	5-100%RH@40°C	
Protection class	IP66/IP67	
Dangerous condition	NEPSI	ExialICT4(GYB16.1962X)* ExdIICT6(GYB16.1254X)*
	ATEX	Ex db IIC T6 Gb, Ex tb IIIC T80°C Db(CML 19ATEX1078X)* Ex ia IIC T4 Ga(CML 19ATEX1078)*
	IECEX	Ex db IIC T6 Gb, Ex tb IIIC T80°C Db(IECEX NEP 18.0008X)* Ex ia IIC T4 Ga(IECEX NEP 18.0008X)*
	CSA	Class I, Division 1, Group A, B, C and D T6 Class II, Division 1 Group E, F and G T80°C Class III (No.: 80020805)*
*Please consult engineers for details		

Tel.: +39 011 198 218 39 - E-mail: info@asit-ge.com - www.asit-ge.com

Le caratteristiche dichiarate possono cambiare senza alcun preavviso

EMC ENVIROMENT

NO.	Test items	Basic standards	Test conditions	Performance level
1	Radiated interference	GB/T 9254/CISPR22	30MHz-1000MHz	OK
2	Conducted interference (DC power port)	GB/T 9254/CISPR22	0.15MHz-30MHz	OK
3	Electrostatic discharge immunity test (ESD)	GB/T 17626.2/IEC61000-4-2	4kV(Contact), 8kV(Air)	B(Note2)
4	Immunity to radio frequency EM-fields	GB/T 17626.3/IEC61000-4-3	10V/m(80MHz-1GHz)	A(Note1)
5	Power frequency magnetic field Immunity test	GB/T 17626.8/IEC61000-4-8	30A/m	A(Note1)
6	Electrical fast transient / Burst Immunity Test	GB/T 17626.4/IEC61000-4-4	2kV(5/50ns, 100kHz)	B(Note2)
7	Surge immunity requirements	GB/T 17626.5/IEC61000-4-5	1kV(Line to line) 2kV(Line to ground) (1.2us/50us)	B(Note2)
8	Immunity to conducted disturbances induced by radio frequency fields	GB/T 17626.6/IEC61000-4-6	3V(150kHz-80MHz)	A(Note1)

(Note 1) Performance level A: The performance within the limits of normal technical specifications.
 (Note 2) Performance level B: Temporary reduction or loss of functionality or performance, it can restore itself. The actual operating conditions, storage and data will not be changed.

MENU' FUNCTION SPECIFIC MENU Transmission module type

Output signal	Local control	Remote control
4-20mA + HART	LCD/3 buttons on body	HART
4-20mA	LCD/3 buttons on body	-

Measuring menu set

Mark	State
URV	Upper range value, 20mA
LRV	Lower range value, 4mA

Damping time

Units	Setting range
S	0-100

Analog output type

Parameters	Output type
mA LINER	Linearity
mA $\sqrt{\quad}$	Square root

Alarm signal

Parameters	Alarm signal
ALARM NO	None
ALARM H	20.8mA
ALARM L	3.8mA

Quick menu

Parameter	Instruction
PV=0	Set current output to zero value, used to correct the error caused by static pressure and installation.
Zero adjustment	4mA re-range with pressure
Span adjustment	20mA re-range with pressure
Restore factory setting	Restore backup data when error

Fix output

Parameters	Fix output value
FIX/C NO	None
3.8000	3.8000mA
4.0000	4.0000mA
8.0000	8.0000mA
12.000	12.000mA
16.000	16.000mA
20.000	20.000mA
20.800	20.800mA

LCD display unit

Display mode	Details
PV	Process variable shows on main screen, percentage and progress bar shows on secondary screen
mA	Current shows on main screen, percentage and progress bar shows on secondary screen
%	Percentage shows on main screen, percentage and progress bar shows on secondary screen

Unit

Unit	Definition
kPa	Kilopascal
MPa	Megapascals
bar	Bar
psi	Pounds per square inch
mmHg	Millimetre(s) of mercury@0°C
mmH2O	Millimeter of water@4°C
mH2O	Meter of water@4°C
inH2O	Inches of water@4°C
ftH2O	Feet of water@4°C
inHg	Inches of mercury@0°C
mHg	Meter mercury column@0°C
TORR	Torr
mbar	Millibar
g/cm2	Gram per square centimeter
kg/cm2	Kilogram per square centimeter
Pa	PA
ATM	Standard atmospheric pressure
mm	Millimeter(Note1)
m	Meter(Note1)
Note1: length unit need mark medium density	

PRODUCT SELECTION INSTRUCTION

Sensor select instruction

Code	Nominal value	Description
S602D	6kPa	Range -6-6kPa, smallest calibratable span 200Pa
S403D	40kPa	Range -40-40kPa, smallest calibratable span 400Pa
S254D	250kPa	Range -250-250kPa, smallest calibratable span 2.5kPa
S105D	1MPa	Range -0.1-1MPa, smallest calibratable span 10kPa
S305D	3MPa	Range -0.5-3MPa, smallest calibratable span 30kPa
S106D	10MPa	Range -0.5-10MPa, smallest calibratable span 100kPa

Code	Position	Instruction
S	Diaphragm material	SUS316L
H		Hastelloy C
S	Fluid filling	Silicon oil, temperature resistance: -45-205°C
D		Inert oil, temperature resistance: -45-160°C
P	Sensor seal	O-ring, PTFE, temperature resistance:-100-280°C

Electrical connection select instruction

Code	Item	Description
T1	Electrical connection	Aluminum-alloy terminal, 2 cable entry M20*1.5(F), red body, white cover
R1	Cable entry protector	Waterproof connector M20X1.5 one side, blind plug another side, PVC material, 6-8mm diameter cable only, IP67
R2		Flame proof, 1/2 NPT(F) one side, blind plug another side, stainless steel material, 6-8mm diameter cable only, IP67
R3		Flame proof, M20X1.5(F) one side, blind plug another side, stainless steel material, 6-8mm diameter cable only, IP67


Items



T1



S/H



R1



R2/R3



S


Transmission module

Code	Items	Description
F	Output signal	4-20mA two wire, power supply: 10.5-55VDC
H		4-20mA+HART two wire, power supply: 16.5-55VDC
R		Modbus-RTU/RS485, power supply: 5-32VDC
A	Display	Without display
C		With LCD display

Items



C

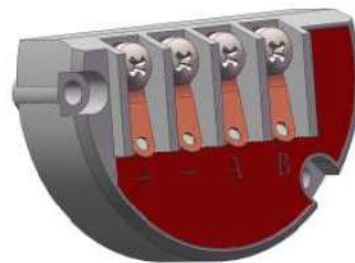


N1

Process connection selection

Code	Item	Description
H1	Flange/ Drain Valve	H structure, double flanges, process connection 1/4-18NPT(F), drain valve on the rear end of flange, material SS 316
H2		H structure, double flanges, process connection 1/4-18NPT(F), drain valve on the up part of flange, material SS 316
H3		H structure, double flanges, process connection 1/4-18NPT(F), drain valve on the down part of flange, material SS 316

H1	
H2	
H3	

Wetted parts

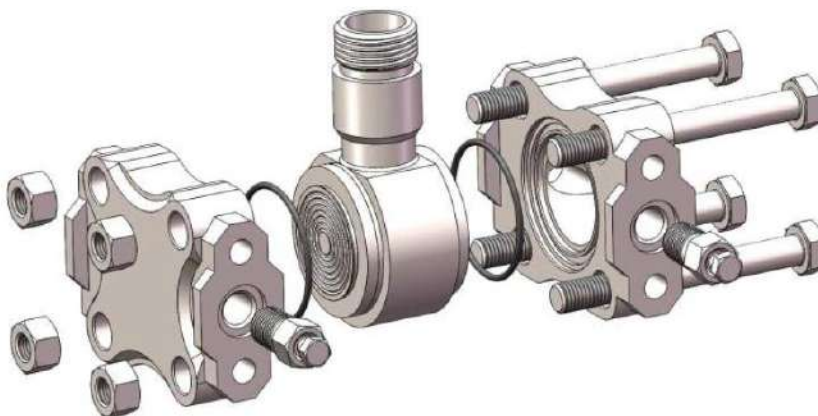

Process connection adaptor

Code	Item	Description
A1	Process connection adaptor	Adaptor, M20*1,5 (M) with pressure-guided pipe $\Phi 14*2*30$, SS304, apply to H-structure
A2		Adaptor, 1/2-14NPT(F), SS 304, apply to H-structure

Items



A1




A2


Brackets

Code	Items	Details
B1	Fixed mounting	Pipe mounting bent bracket, 2" pipe, carbon steel, apply to H-structure
B2		Plate mounting bent bracket, carbon steel, apply to H-structure
B3		Pipe mounting flat bracket, 2" pipe, carbon steel, apply to H-structure

Items

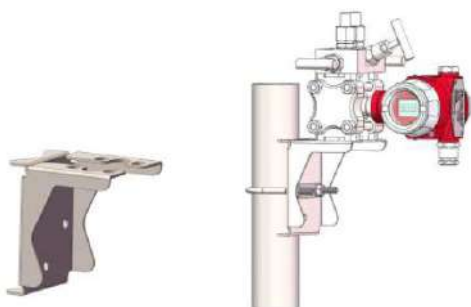

B1

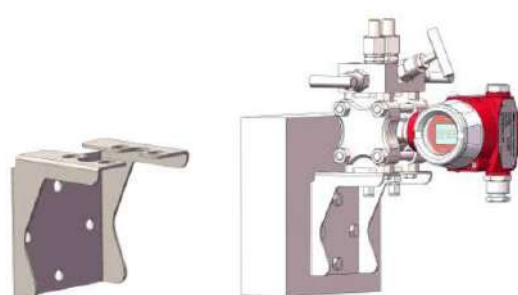



B2





B3

PRODUCT DRAWING AND DIMENSION


Drawing and dimension with display (C)

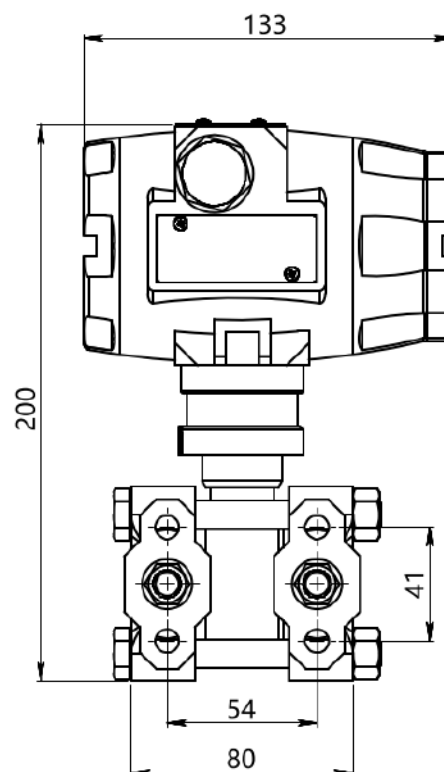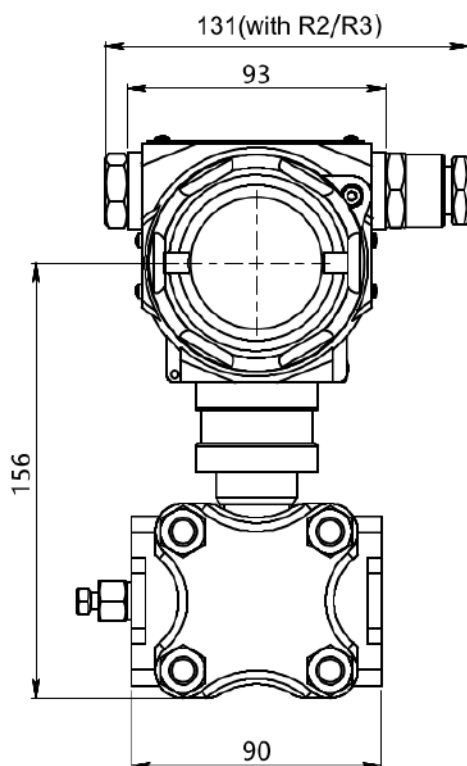


Drawing and dimension without display (A)

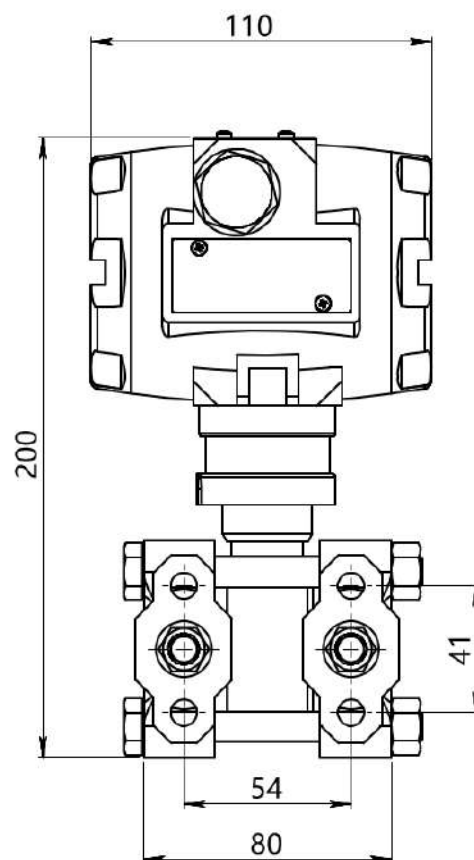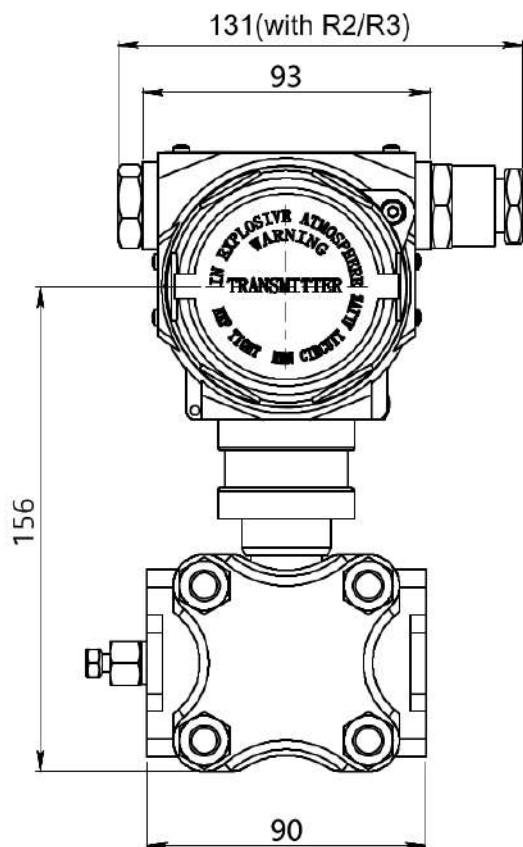

Adaptor (A1) drawing and dimension

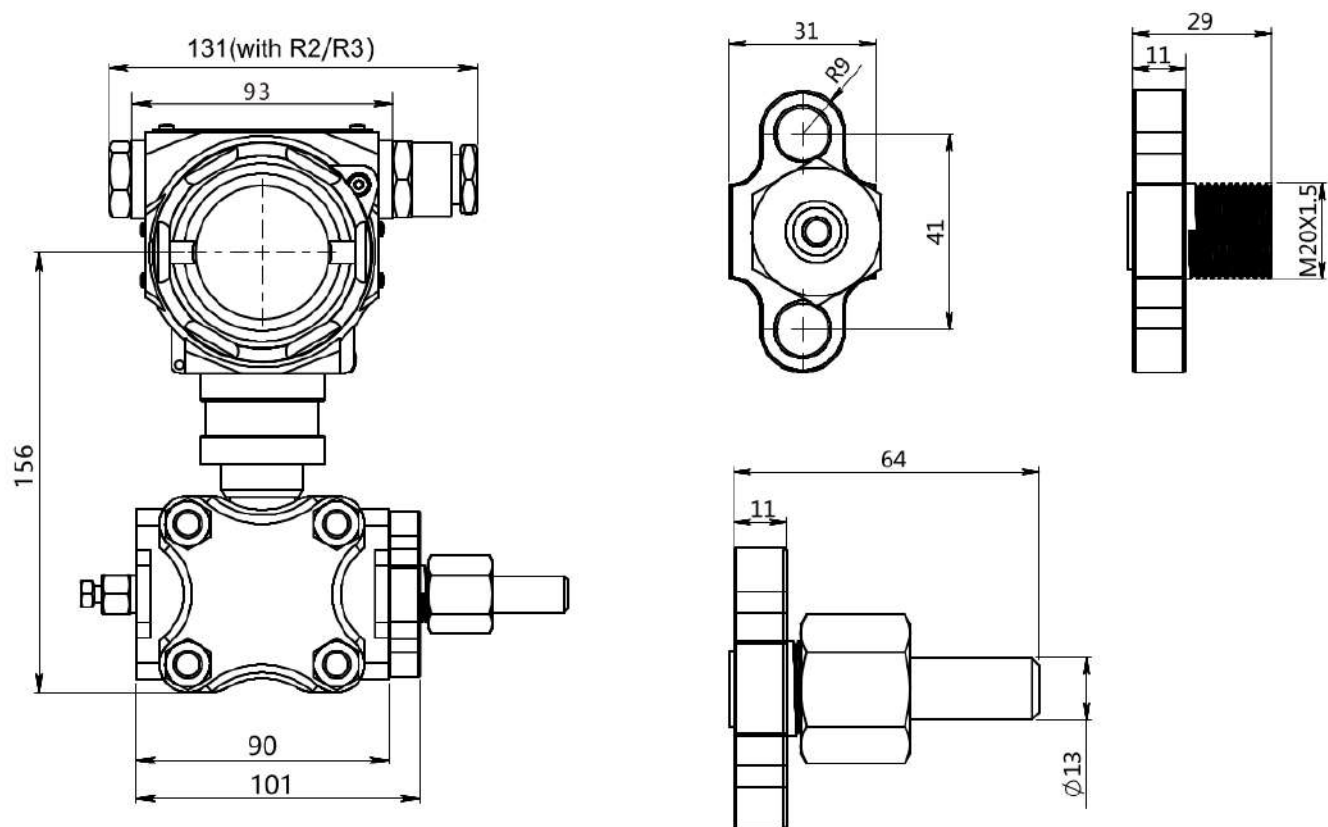

Adaptor (A2) drawing and dimension

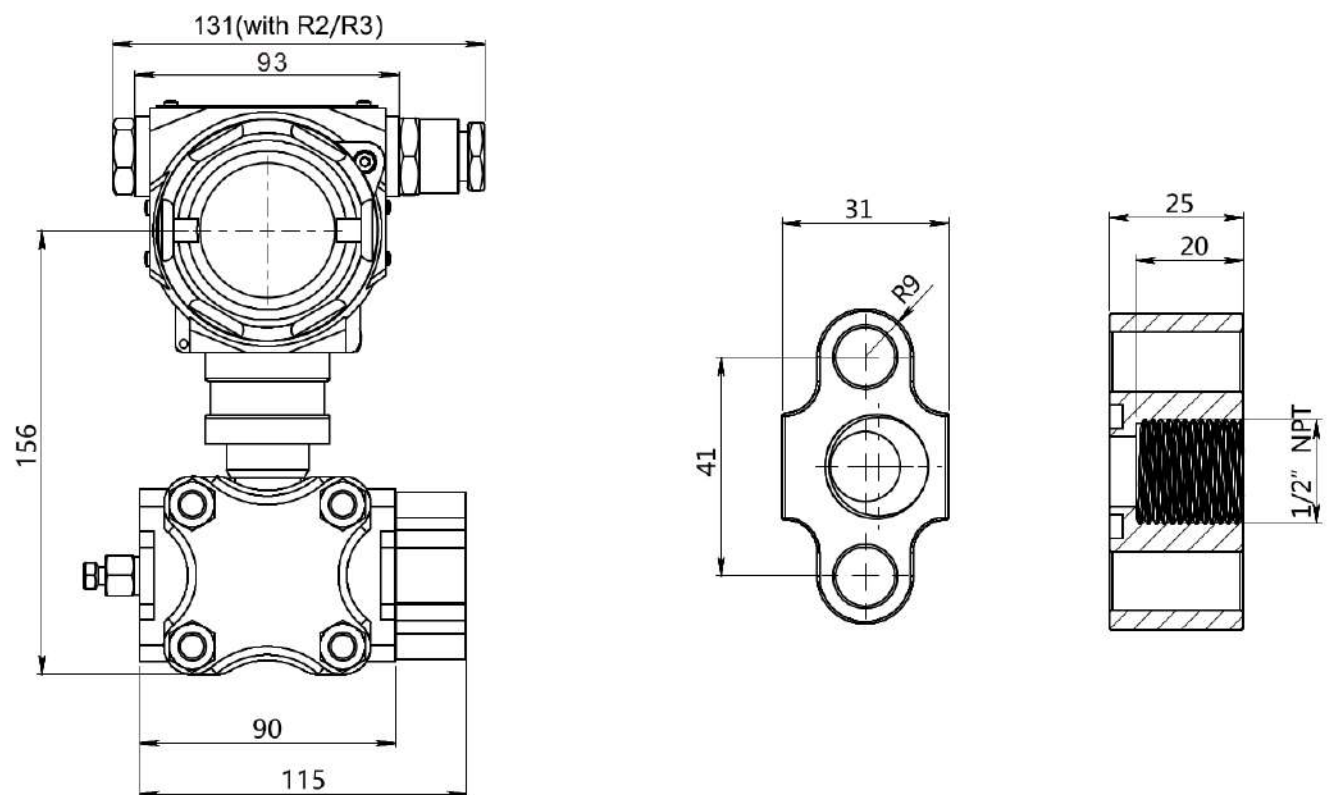

INSTALLATION DRAWING AND DIMENSION

Pipe mounting bent bracket (B1) drawing and dimension



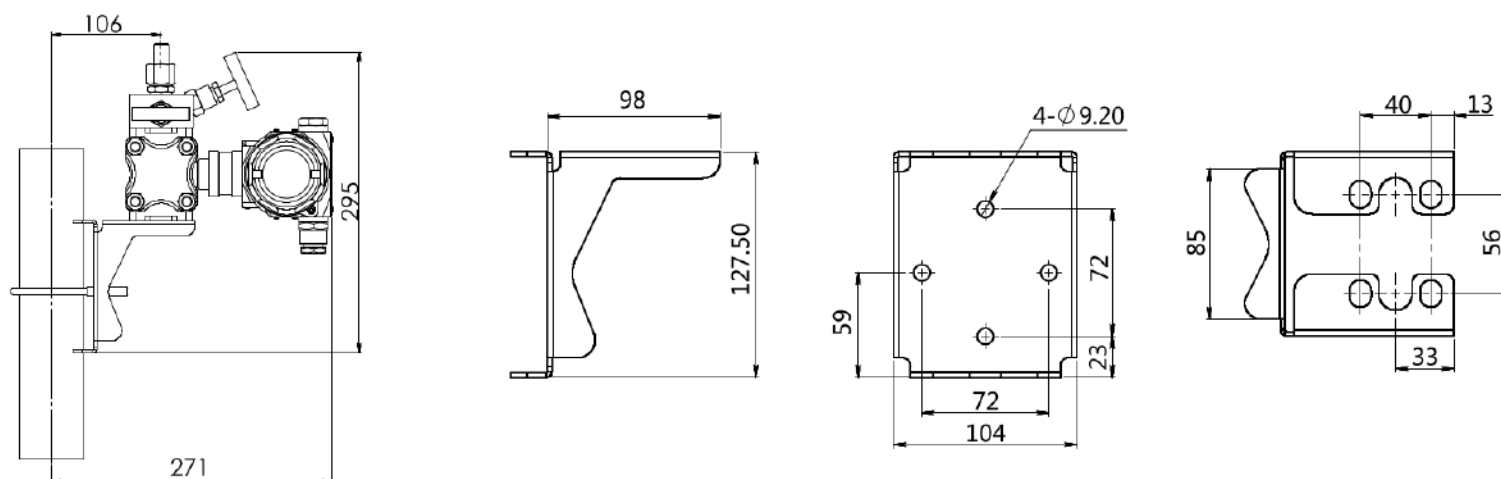


Plate mounting bent bracket (B2) drawing and dimension

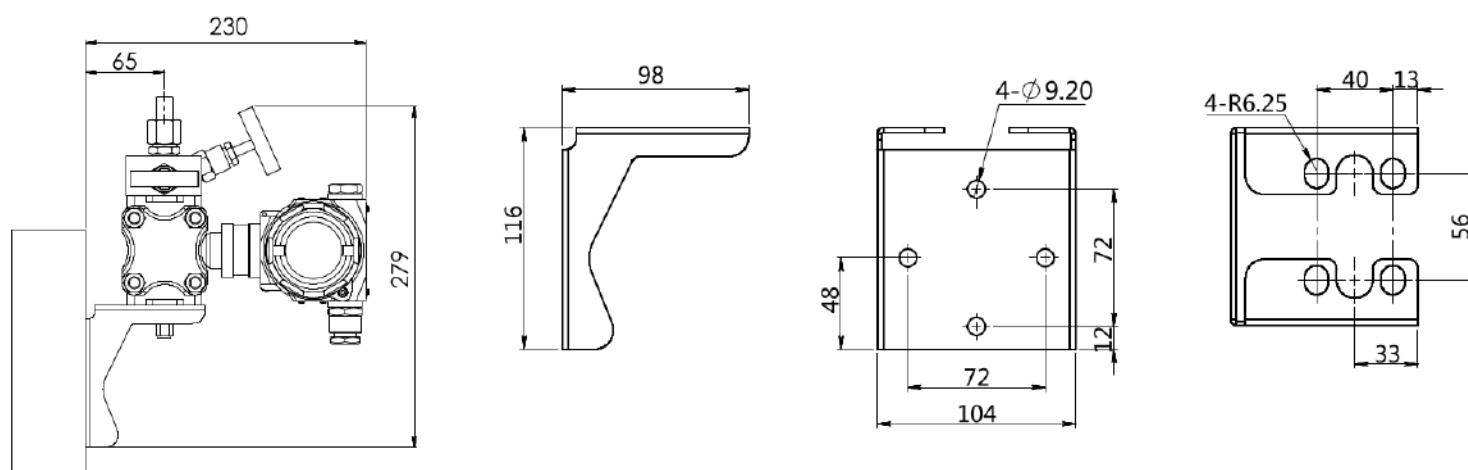

Pipe mounting flat bracket (B3) drawing and dimension

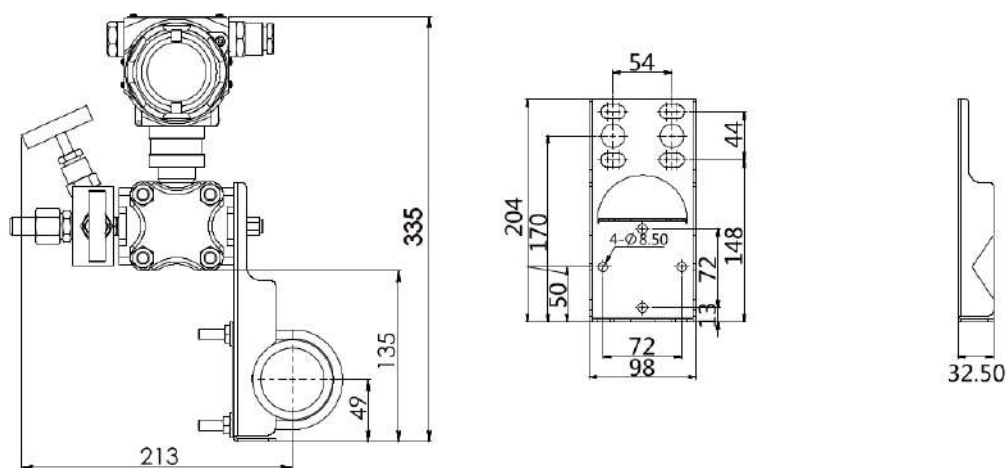

ORDERING INFORMATION

Item	Parameters	Code	Instruction	(*)fast delivery available
	Model	DMP305X-D5T	Monosilicon differential pressure transmitter	
Sensor	Separator	-	Detailed specifications as following	
	Pressure range code	S602D	Nominal value(URL): 6kPa	*
		S403D	Nominal value(URL): 40kPa	*
		S254D	Nominal value(URL): 250kPa	*
		S105D	Nominal value(URL): 1MPa	
		S305D	Nominal value(URL): 3MPa	
		S106D	Nominal value(URL): 10MPa	
	Diaphragm material	S	SS316L	*
		H	Hastelloy C	
	Isolated filling fluid	S	Silicone oil, temperature resistance: -45-205°C	*
		D	Inert oil, temperature resistance: -45-180°C	
	Sensor seal	P	O-ring, PTFE, temperature resistance: -100-280°C	
Electrical connection	Separator	-	Detailed specifications as following	
	Electrical connection	T1	Aluminum-alloy terminal, 2 cable entry M20*1.5(F), red body, white cover	*
	Cable entry protector	R1	Waterproof connector M20X1.5 one side, blind plug another side, PVC material, 6-8mm diameter cable only, IP66/IP67	*
		R2	Flame proof, 1/2 NPT(F) one side, blind plug another side, stainless steel material, 6-8mm diameter cable only, IP66/IP67	
		R3	Flame proof, M20X1.5(F) one side, blind plug another side, stainless steel material, 6-8mm diameter cable only, IP66/IP67	*
Output	Separator	-	Detailed specifications as following	
	Output signal	H	4-20mA+HART two wire, power supply: 16.5-55VDC	*
		F	4-20mA two wire, power supply: 10.5-55VDC	
		R	Modbus-RTU/RS485, power supply: 5-32VDC	
	Display	C	LCD display	*
		A	Without LCD display	
Process connection	Separator	-	Detailed specifications as following	
	Process connection	H1	H structure, double flanges, process connection 1/4-18NPT(F), drain valve on the rear end of flange, material SS 316	*
		H2	H structure, double flanges, process connection 1/4-18NPT(F), drain valve on the up part of flange, material SS 316	
		H3	H structure, double flanges, process connection 1/4-18NPT(F), drain valve on the down part of flange, material SS 316	

Selection

Additional options	Separator	-	Detailed specifications as following	(*)fast delivery available
	Process connection accessory	/A1	Adaptor, M20*1.5 (M) with pressure-guided pipe Φ 14*2*30,SS304, apply to H-structure	*
		/A2	Adaptor, 1/2-14NPT(F), SS 304, apply to H-structure	
	Fix mounting accessory	/B1	Pipe mounting bent bracket, 2" pipe, carbon steel, apply to H-structure	
		/B2	Plate mounting bent bracket, carbon steel, apply to H-structure	
		/B3	Pipe mounting flat bracket, 2" pipe, carbon steel, apply to H-structure	*
	Calibration report	/Q1	Calibration report provide by our company	
		/Q2	Calibration report provide by chinese authorised third party	
		/Q3	Static pressure report (Differential pressure only)	
	Approvals	/E1	Flame proof certificate NEPSI, ExdbIICT6 IECEX or ATEX, Ex db IIC T6 Gb Ex tb IIIC T80°C CDb	1
		/I1	Intrinsic safety certificate IECEX or ATEX, ExialICT4Ga NEPSI, ExialICT4	2
		/E2	Flame proof certificate, CSA Class I, Division 1, Group A, B, C and D T6 Class II, Division 1 Group E, F and G T80°C Class III	
		/F3	CE certificate	
	Wetted parts treatment	/G1	Ungrease treatment	
		/G2	Electropolishing treatment	

Note:

1 Please indicate ATEX or IECEX or NEPSI when ordering

2 Please indicate ATEX or IECEX or NEPSI when ordering

Factory settings and parameters

Item	Menu mark	Factory setting value
Tag position	None	0(No specific settings)
Analog output type	mA	Liner(No specific settings)
Display mode	DISP	PV(No specific settings)
Alarm signal	ALARM	No(No specific settings)

Item	Menu mark	Factory setting value
Damping value	DAMP	0(No specific settings)
4mA Lower range value	LRV	According to the order
20mA Upper range value	URV	According to the order
Process unit	U	According to the order

APPROVALS

CE

Certificate organization	ISET
License scope	DMP305X series pressure/ differential pressure transmitter
Mark	EU
EMC instruction	2014/30/EU
Standard	AC/0100708
Registration number	IT41353LG161207

Flame proof certificate

Certificate organization	NEPSI	ATEX	IECEx	CSA
License scope	DMP305X pressure/differential pressure transmitter			
Explosion-proof mark	ExdIICT6	Ex db IIC T6 Gb, Ex tb IIIC T80°C Db		Class I, Division 1, Group A, B, C and D T6 Class II, Division 1 Group E, F and G T80°C Class III
Working temperature	-20°C to +55°C	-20°C to +60°C		-40-60°C
Maximum medium temperature	+80°C			
Registration number	GYB16.1254X	CML 19ATEX1078X	IECEx NEP 18.0008X	80020805

Intrinsic safety certifite

Certificate organization	NEPSI	ATEX	IECEx
License range	DMP305X series pressure/ differential pressure transmitter		
Explosion-proof mark	ExiaIICT4	Ex ia IIC T4 Ga	
Ambient temperature	-40°C to +60°C		-20°C to +60°C
Medium maximum temperature	+120°C		
Registration number	GYB16.1962X	CML 19ATEX1078X	IECEx NEP 18.0008X
Intrinsically safe parameter description	Maximum input voltage:28VDC		Maximum input voltage:28VDC
	Maximum input current:100mA		Maximum input current:93mA
	Maximum input power:0.7w		Maximum input power:0.65w
	Maximum internal equivalent parameters Ci(uF):0		
	Maximum internal equivalent parameters Li(mH):0.01		Maximum internal equivalent parameters Li(mH):0

RoHS

Certificate organization	ECM
License scope	DMP305X pressure/differential pressure transmitter
Mark	RoSH
Instruction	2011/65/EU
Certification criteria	IEC62321-1:2013 IEC62321-5:2014 IEC62321-2:2013 IEC62321-6:2015 IEC62321-4:2014 IEC62321-7-1:2015
Registration number	0H180504.SLIUQ03



ASIT ITALIA S.R.L.

**Sede operativa e Uffici
Via Quintino Sella, 6
10020 Riva presso Chieri (TO)
T (+39) 011 198 218 39 - F (+39) 011 198 371 06**

INFO@ASIT-GE.COM

WWW.ASIT-GE.COM



Company with
Certificate of Quality
System ISO 9001:2015
Cert n°38785/19/S