


**ASIT ITALIA**

## METAL TUBE FLOW METER

AI.BR250S

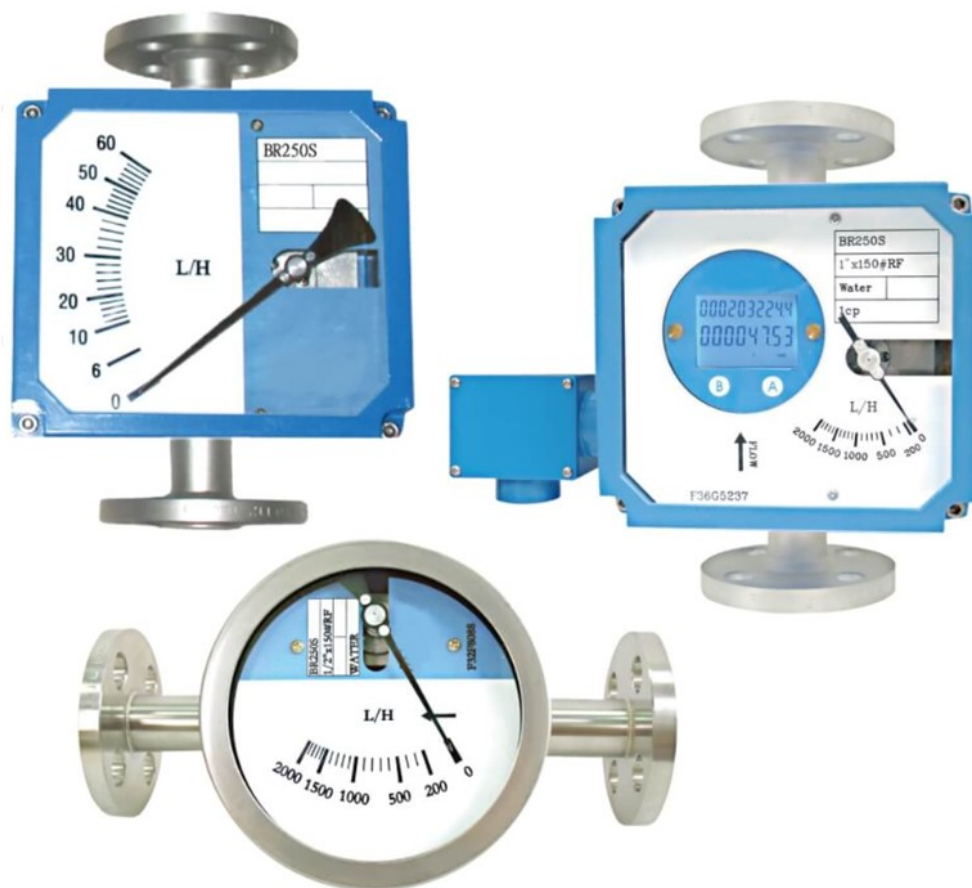

# TECHNICAL DATA

**Case Material:** Aluminium alloy case with paint; SS316 available

**Body Wetted Parts Material:** SS316, indication via magnetic coupling (no sealed)

**Lens Material:** Safety Glass - **Scales Calibrated:** in l/h, m3/h, kg/h, %, etc.

**Flow Rates For:** SS316 Float: - Water: 30 l/h up to 400,000 l/h (special ranges on request)  
- Air: 0.8 Nm3/h up to 1,200 Nm3/h

**Connection Type:** Thread Type, Flange Type - **Connection Size:** 1/4" - 8"

**Mounting:** Vertical and Horizontal - **Mounting Length:** 250mm for size 5"-8"

**Protection Class:** Weather Proof IP66/IP68 or Ex. proof - **Accuracy:** +/-2.5%F.S (+/-2.0% F.S option)

**Max. Pressure:** 40 kg/cm2; option: up to 100 kg/cm2 - **Working Temp.:** -50 to 200°C, up to 400°C req.

**Option:** Switch available (micro switch 5A/125VAC, 5A/250VAC, 2A/30VDC); Adjustable Reed alarm switch (form A bistable type, N.O. type); Adjustable Inductive alarm switch; 4-20mA (2-wires) analog output


**LCD Display:** - Totalizer 10 Digit (Top)/Flow Rate 8 Digital (Bottom) - Analog Output: 4-20mA (2-wires)  
- Power Supply: 24 VDC

**\*HART Communication:** available

**Two Wire Transmitter with HART Protocol:** - Galvanic Isolation and Suitable for appl. SIL2 installations

## DIMENSIONS


**IP66 Case Type:** (A-1) Rectangle Bolt Tighe Type  
**Housing Material:** Aluminum alloy case with paint

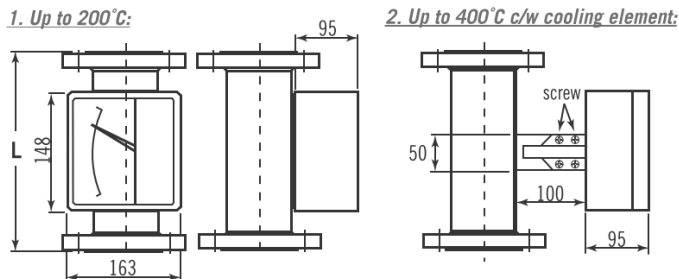

| (A1) | Body Size |      |     |        |     |        |     |     |     |     |
|------|-----------|------|-----|--------|-----|--------|-----|-----|-----|-----|
|      | 1/2"      | 3/4" | 1"  | 1 1/2" | 2"  | 2 1/2" | 3"  | 4"  | 5"  | 6"  |
| L    | 250       | 250  | 250 | 250    | 250 | 250    | 250 | 250 | 300 | 300 |

• Flange rating is ANSI 150LB; please consult with the manufacturer for others flange rating and customized L length is on request.


**IP68 Case Type:** (B-1) Round Bayonet Ring Type (only for indicating)  
**Housing Material:** SS316

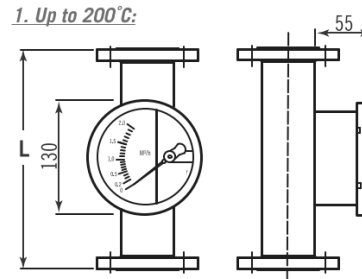

| (B1) | Body Size |      |     |        |     |        |     |     |     |     |
|------|-----------|------|-----|--------|-----|--------|-----|-----|-----|-----|
|      | 1/2"      | 3/4" | 1"  | 1 1/2" | 2"  | 2 1/2" | 3"  | 4"  | 5"  | 6"  |
| L    | 250       | 250  | 250 | 250    | 250 | 250    | 250 | 250 | 300 | 300 |

• Flange rating is ANSI 150LB; please consult with the manufacturer for others flange rating and customized L length is on request.


**Case Type:** (A-2) & (B-2) Round Screw Tight Type  
**Housing Material:** IP66 (A-2) Aluminum alloy, IP68 (B-2) SS316

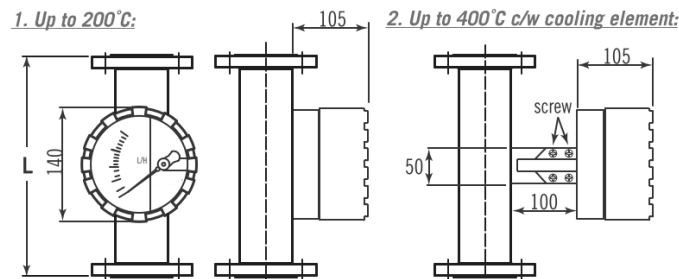

| (A2)<br>(B2) | Body Size |      |     |        |     |        |     |     |     |     |
|--------------|-----------|------|-----|--------|-----|--------|-----|-----|-----|-----|
|              | 1/2"      | 3/4" | 1"  | 1 1/2" | 2"  | 2 1/2" | 3"  | 4"  | 5"  | 6"  |
| L            | 250       | 250  | 250 | 250    | 250 | 250    | 250 | 250 | 300 | 300 |

• Flange rating is ANSI 150LB; please consult with the manufacturer for others flange rating and customized L length is on request.

**Explosion Proof Case Type:** (C) Explosion Proof Certificate on Housing only  
(D) & (D1) Taiwan Explosion Proof Certification  
**Housing Material:** (C) Aluminum alloy, (D) Aluminum alloy, (D1) SS316

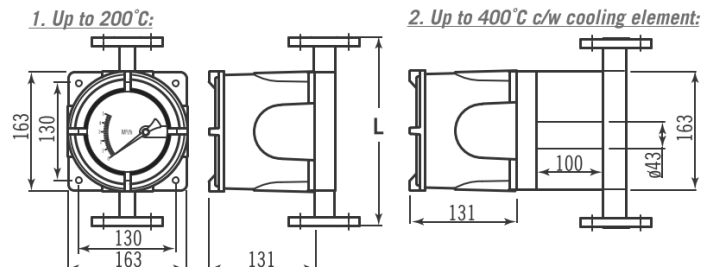



| (C) | Body Size |      |     |        |     |        |     |     |     |     |
|-----|-----------|------|-----|--------|-----|--------|-----|-----|-----|-----|
|     | 1/2"      | 3/4" | 1"  | 1 1/2" | 2"  | 2 1/2" | 3"  | 4"  | 5"  | 6"  |
| L   | 250       | 250  | 250 | 250    | 250 | 250    | 300 | 300 | 300 | 300 |

| (D)<br>(D1) | Body Size |      |     |        |     |        |     |     |     |     |
|-------------|-----------|------|-----|--------|-----|--------|-----|-----|-----|-----|
|             | 1/2"      | 3/4" | 1"  | 1 1/2" | 2"  | 2 1/2" | 3"  | 4"  | 5"  | 6"  |
| L           | 250       | 250  | 250 | 250    | 250 | 250    | 250 | 250 | 300 | 300 |

• Flange rating is ANSI 150LB; please consult with the manufacturer for others flange rating and customized L length is on request.


# ALARM/ANALOG OUTPUT

## BR-250S / GS-M (Micro Switch)

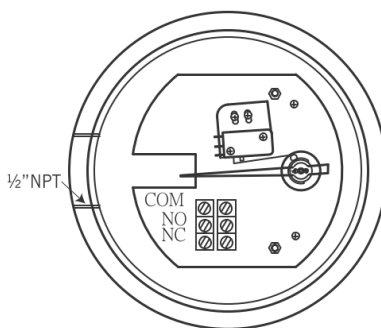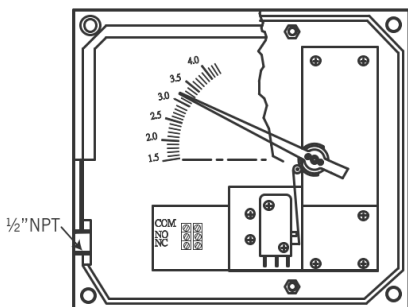

**Adjustable Micro Switch, Series BR250S/GS-M**  
**1 adjustable alarm contact**  
**Load:** 5A/125VAC, 5A/250VAC, 2A/30VDC  
**Temperature:** -25°C ~ +70°C (AMB)  
**Hysteresis:** ±10% F.S (Dead Band)

## BR-250S / GS-R (Reed Switch)

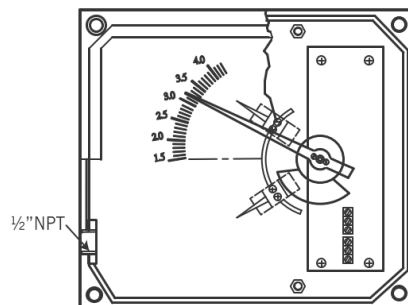

**Alarm Switch:** One or Two setting point, form A bistable type (N.O Type)  
**Hysteresis:** ±10% F.S (Dead Band)  
**Switch Rating:** AC 125V 0.5A / DC 100V 10W / Max. DC 250V < 40mA


### 1 adjustable alarm

Contact setting point should be within 10% to 100% of F.S

### 2 adjustable alarm

The second setting point should be a gap 40% from first setting point

## BR-250S / GS-C (Inductive Switch)

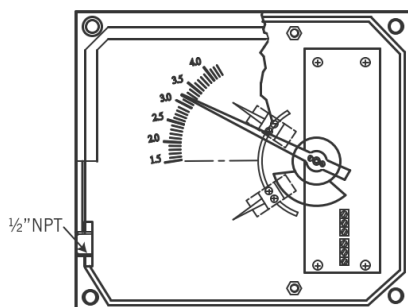

### Adjustable Inductive Alarm Switch

**Hysteresis:** ±1% F.S (Dead Band)

**Inductive Sensors Slotted Type:** 3.5 mm Slot Switch

**DC. voltage 2 wire's to DIN19234 (NAMUR) for use in hazardous areas**

- Power Supply: 8 VDC (Ri.approx. 1kΩ)
- Current Consumption: Active face uncovered 3mA; Active face covered 1mA
- Ambient Temp.: -25°C ~ +70°C

### Isolated barriers output relay for inductive sensor

- Rail Mounting
- Control Circuit EEx ia IIC
- EMC acc to NAMUR NE21
- Contact Loading 250 VAC 2A SPDT 40 VDC 2A

### 1 adjustable alarm

Contact setting point should be within 10% to 100% of F.S

For

24VDC : KFD2-SR2-Ex1.W

115VAC: KFA5-SR2-Ex1.W

230VAC: KFA6-SR2-Ex1.W

### 2 adjustable alarm


The second setting point should be a gap 65% from first setting point

For


24VDC : KFD2-SR2-Ex2.W

115VAC: KFA5-SR2-Ex2.W

230VAC: KFA6-SR2-Ex2.W




## BR-250S / GT (Analog Output) / GTA (Hall Sensor)



**Electric Transmitter BR-250S/GT/GTA**  
**Analog Output Available:** 4~20mA (2-wires)  
**No Alarm Switch Available**  
**Power Supply:** 24VDC  
**Temperature:** -25°C ~ +70°C (AMB)

## LCD Display / Totalizer




**LCD Display:** Totalizer 10 Digital (Top) / Flow Rate 8 Digital (Bottom)  
**Analog Output Available:** 4~20mA (2-wires)  
**Power Supply:** 24 VDC


### NOTE.

1. This is for the case type (A-1) only.
2. Please refer to the catalogue of D-1000 for the explosion proof type.


# STANDARD SCALES

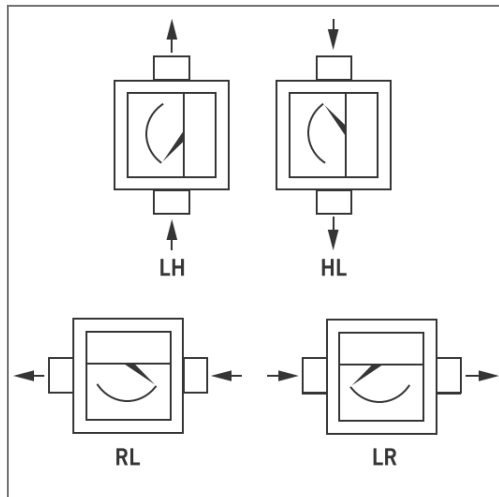

## Damping Mechanical (Option Function)

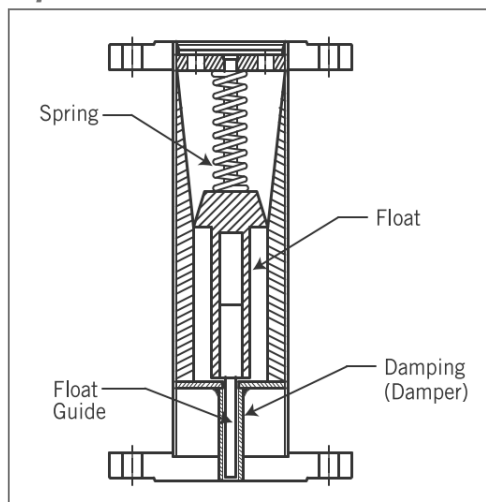

## Principle

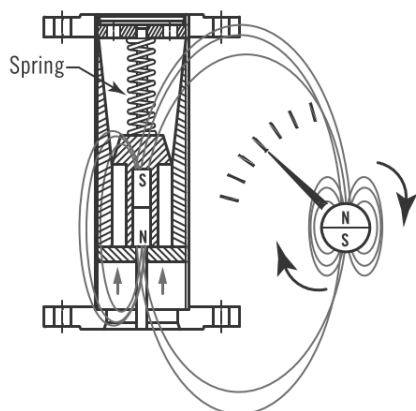

| Tube       | L/H 20°C<br>Water | NM <sup>3</sup> /H<br>Air 0°C 1.013bar | Pressure Loss<br>psig | Connection | Accuracy  |
|------------|-------------------|----------------------------------------|-----------------------|------------|-----------|
| BR250S01   | 30 ~ 300          | 0.8 ~ 8                                | ≤3.5                  | 1/2"       | ±2.5% F.S |
| BR250S02   | 40 ~ 400          | 1 ~ 10                                 | ≤3.8                  | 1/2"       | ±2.5% F.S |
| BR250S03   | 50 ~ 500          | 1.2 ~ 12                               | ≤3.7                  | 1/2"       | ±2.5% F.S |
| BR250S04   | 70 ~ 700          | 1.7 ~ 17                               | ≤3.6                  | 1/2"       | ±2.5% F.S |
| BR250S05   | 80 ~ 800          | 2 ~ 20                                 | ≤3.8                  | 1/2"       | ±2.5% F.S |
| BR250S06   | 100 ~ 1000        | 2.7 ~ 27                               | ≤4.0                  | 1/2"       | ±2.5% F.S |
| BR250S07   | 150 ~ 1500        | 4 ~ 40                                 | ≤4.2                  | 1/2"       | ±2.5% F.S |
| BR250S08   | 180 ~ 1800        | 5 ~ 50                                 | ≤4.5                  | 1/2"       | ±2.5% F.S |
| BR250S09   | 150 ~ 1500        | 4 ~ 40                                 | ≤3.8                  | 3/4"       | ±2.5% F.S |
| BR250S10   | 200 ~ 2000        | 6 ~ 60                                 | ≤4.0                  | 3/4"       | ±2.5% F.S |
| BR250S10-1 | 270 ~ 2700        | 6 ~ 60                                 | ≤4.0                  | 3/4"       | ±2.5% F.S |
| BR250S11   | 300 ~ 3000        | 9 ~ 90                                 | ≤3.4                  | 1"         | ±2.5% F.S |
| BR250S12   | 400 ~ 4000        | 12 ~ 120                               | ≤3.6                  | 1"         | ±2.5% F.S |
| BR250S13   | 600 ~ 6000        | 15 ~ 150                               | ≤3.9                  | 1"         | ±2.5% F.S |
| BR250S13-1 | 1000 ~ 10000      | 15 ~ 150                               | ≤3.9                  | 1"         | ±2.5% F.S |
| BR250S14   | 600 ~ 6000        | 15 ~ 150                               | ≤3.6                  | 1½"        | ±2.5% F.S |
| BR250S15   | 800 ~ 8000        | 24 ~ 240                               | ≤3.8                  | 1½"        | ±2.5% F.S |
| BR250S16   | 1000 ~ 10000      | 30 ~ 300                               | ≤3.9                  | 1½"        | ±2.5% F.S |
| BR250S17   | 1200 ~ 12000      | 35 ~ 350                               | ≤4.3                  | 1½"        | ±2.5% F.S |
| BR250S17-1 | 1500 ~ 15000      | 35 ~ 350                               | ≤4.3                  | 1½"        | ±2.5% F.S |
| BR250S18   | 1200 ~ 12000      | 35 ~ 350                               | ≤3.2                  | 2"         | ±2.5% F.S |
| BR250S19   | 1600 ~ 16000      | 50 ~ 500                               | ≤3.4                  | 2"         | ±2.5% F.S |
| BR250S20   | 2000 ~ 20000      | 60 ~ 600                               | ≤3.8                  | 2"         | ±2.5% F.S |
| BR250S21   | 2500 ~ 25000      | 70 ~ 700                               | ≤4.1                  | 2"         | ±2.5% F.S |
| BR250S21-1 | 3000 ~ 30000      | 70 ~ 700                               | ≤4.1                  | 2"         | ±2.5% F.S |
| BR250S22   | 2000 ~ 20000      | 70 ~ 700                               | ≤3.0                  | 2½"        | ±2.5% F.S |
| BR250S23   | 3000 ~ 30000      | 80 ~ 800                               | ≤3.2                  | 2½"        | ±2.5% F.S |
| BR250S23-1 | 3500 ~ 35000      | 80 ~ 800                               | ≤3.2                  | 2½"        | ±2.5% F.S |
| BR250S24   | 3000 ~ 30000      | 90 ~ 900                               | ≤3.4                  | 3"         | ±2.5% F.S |
| BR250S25   | 4000 ~ 40000      | 120 ~ 1200                             | ≤3.7                  | 3"         | ±2.5% F.S |
| BR250S25-1 | 6000 ~ 60000      | 120 ~ 1200                             | ≤3.7                  | 3"         | ±2.5% F.S |
| BR250S26   | 5000 ~ 50000      | -----                                  | ≤3.6                  | 4"         | ±2.5% F.S |
| BR250S27   | 6000 ~ 60000      | -----                                  | ≤4.2                  | 4"         | ±2.5% F.S |
| BR250S27-1 | 10000~100000      | -----                                  | ≤4.2                  | 4"         | ±2.5% F.S |
| BR250S28   | 10000~100000      | -----                                  | ≤3.8                  | 5"         | ±2.5% F.S |
| BR250S28-1 | 12000~120000      | -----                                  | ≤3.8                  | 5"         | ±2.5% F.S |
| BR250S29   | 12000~120000      | -----                                  | ≤4.3                  | 5"         | ±2.5% F.S |
| BR250S29-1 | 14000~140000      | -----                                  | ≤4.3                  | 5"         | ±2.5% F.S |
| BR250S30   | 15000~150000      | -----                                  | ≤4.5                  | 6"         | ±2.5% F.S |
| BR250S31   | 20000~200000      | -----                                  | ≤4.6                  | 6"         | ±2.5% F.S |
| BR250S32   | 25000~250000      | -----                                  | ≤4.7                  | 6"         | ±2.5% F.S |
| BR250S33   | 20000~200000      | -----                                  | ≤4.6                  | 8"         | ±2.5% F.S |
| BR250S34   | 30000~300000      | -----                                  | ≤4.7                  | 8"         | ±2.5% F.S |
| BR250S35   | 35000~350000      | -----                                  | ≤4.7                  | 8"         | ±2.5% F.S |

# ORDERING INFORMATION

| BR250S            | Code                                                     | Type                                                               | Code                                                                                                                                                                                                                                                                                                               | Connection Size |                     |      |                          |    |                                         |   |                                                          |   |           |
|-------------------|----------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------|------|--------------------------|----|-----------------------------------------|---|----------------------------------------------------------|---|-----------|
| SIL2<br>Certified | G                                                        | Indicating Only                                                    | 4B                                                                                                                                                                                                                                                                                                                 | ¼" BSP (Female) | 4N ¼" NPT (Female)  |      |                          |    |                                         |   |                                                          |   |           |
|                   | GS                                                       | Indicating + Switch                                                | 2B                                                                                                                                                                                                                                                                                                                 | ½" BSP (Female) | 2N ½" NPT (Female)  |      |                          |    |                                         |   |                                                          |   |           |
|                   | GT                                                       | Indicating + 4~20mA (no alarm switch available)                    | 6B                                                                                                                                                                                                                                                                                                                 | ¾" BSP (Female) | 6N ¾" NPT (Female)  |      |                          |    |                                         |   |                                                          |   |           |
|                   | GTA                                                      | Hall Sensor Type / Indicating + 4~20mA (no alarm switch available) | 10B                                                                                                                                                                                                                                                                                                                | 1" BSP (Female) | 10N 1" NPT (Female) |      |                          |    |                                         |   |                                                          |   |           |
|                   | GTH                                                      | HART Type / Indicating + HART (no alarm switch available)          | 2F                                                                                                                                                                                                                                                                                                                 | ¼" Flange       |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | 4F                                                                                                                                                                                                                                                                                                                 | ½" Flange       |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | 6F                                                                                                                                                                                                                                                                                                                 | ¾" Flange       |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | 10F                                                                                                                                                                                                                                                                                                                | 1" Flange       |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | 12F                                                                                                                                                                                                                                                                                                                | 1½" Flange      |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | 14F                                                                                                                                                                                                                                                                                                                | 1¾" Flange      |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          | 20F                                                                | 2" Flange                                                                                                                                                                                                                                                                                                          |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          | 22F                                                                | 2½" Flange                                                                                                                                                                                                                                                                                                         |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          | 30F                                                                | 3" Flange                                                                                                                                                                                                                                                                                                          |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          | 40F                                                                | 4" Flange                                                                                                                                                                                                                                                                                                          |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          | 50F                                                                | 5" Flange                                                                                                                                                                                                                                                                                                          |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          | 60F                                                                | 6" Flange                                                                                                                                                                                                                                                                                                          | 80F 8" Flange   |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | <table border="1"> <thead> <tr> <th>Code</th> <th>Transmitter Type, 4~20mA</th> </tr> </thead> <tbody> <tr> <td>G</td> <td>General Type</td> </tr> <tr> <td>O</td> <td>Without Transmitter</td> </tr> </tbody> </table>                                                                                            |                 |                     | Code | Transmitter Type, 4~20mA | G  | General Type                            | O | Without Transmitter                                      |   |           |
| Code              | Transmitter Type, 4~20mA                                 |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| G                 | General Type                                             |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| O                 | Without Transmitter                                      |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | <table border="1"> <thead> <tr> <th>Code</th> <th>Fluid</th> </tr> </thead> <tbody> <tr> <td></td> <td>(G) Gas (O) Oil (L) Liquid (S) Steam</td> </tr> </tbody> </table>                                                                                                                                           |                 |                     | Code | Fluid                    |    | (G) Gas (O) Oil (L) Liquid (S) Steam    |   |                                                          |   |           |
| Code              | Fluid                                                    |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   | (G) Gas (O) Oil (L) Liquid (S) Steam                     |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | <table border="1"> <thead> <tr> <th>Code</th> <th>Range</th> </tr> </thead> <tbody> <tr> <td>S</td> <td>Standard Range</td> </tr> <tr> <td></td> <td>Please direct fill out the flow range in the order code.</td> </tr> </tbody> </table>                                                                         |                 |                     | Code | Range                    | S  | Standard Range                          |   | Please direct fill out the flow range in the order code. |   |           |
| Code              | Range                                                    |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| S                 | Standard Range                                           |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   | Please direct fill out the flow range in the order code. |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | <table border="1"> <thead> <tr> <th>Code</th> <th>Flow Direction</th> </tr> </thead> <tbody> <tr> <td></td> <td>(0) LH (5) HL (10) RL (20) LR</td> </tr> </tbody> </table>                                                                                                                                         |                 |                     | Code | Flow Direction           |    | (0) LH (5) HL (10) RL (20) LR           |   |                                                          |   |           |
| Code              | Flow Direction                                           |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   | (0) LH (5) HL (10) RL (20) LR                            |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | <table border="1"> <thead> <tr> <th>Code</th> <th>LCD Display</th> </tr> </thead> <tbody> <tr> <td>D0</td> <td>With LCD Display IP66, for A1 case only</td> </tr> <tr> <td>D</td> <td>With LCD Display Explosion Proof, (assemble with D-1000)</td> </tr> <tr> <td>N</td> <td>Without</td> </tr> </tbody> </table> |                 |                     | Code | LCD Display              | D0 | With LCD Display IP66, for A1 case only | D | With LCD Display Explosion Proof, (assemble with D-1000) | N | Without   |
| Code              | LCD Display                                              |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| D0                | With LCD Display IP66, for A1 case only                  |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| D                 | With LCD Display Explosion Proof, (assemble with D-1000) |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| N                 | Without                                                  |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | <table border="1"> <thead> <tr> <th>Code</th> <th>Damper</th> </tr> </thead> <tbody> <tr> <td>D</td> <td>With</td> </tr> <tr> <td>N</td> <td>Without</td> </tr> </tbody> </table>                                                                                                                                  |                 |                     | Code | Damper                   | D  | With                                    | N | Without                                                  |   |           |
| Code              | Damper                                                   |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| D                 | With                                                     |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| N                 | Without                                                  |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | <table border="1"> <thead> <tr> <th>Code</th> <th>Conduit</th> </tr> </thead> <tbody> <tr> <td>N</td> <td>Without</td> </tr> <tr> <td>1</td> <td>½" NPT(F)</td> </tr> <tr> <td>2</td> <td>¾" NPT(F)</td> </tr> </tbody> </table>                                                                                   |                 |                     | Code | Conduit                  | N  | Without                                 | 1 | ½" NPT(F)                                                | 2 | ¾" NPT(F) |
| Code              | Conduit                                                  |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| N                 | Without                                                  |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| 1                 | ½" NPT(F)                                                |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| 2                 | ¾" NPT(F)                                                |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
|                   |                                                          |                                                                    | <p><b>CE Mark Request :</b><br/>If stamp the CE2810 mark is necessary, please consult with the manufacturer.</p>                                                                                                                                                                                                   |                 |                     |      |                          |    |                                         |   |                                                          |   |           |
| BR250S            |                                                          |                                                                    |                                                                                                                                                                                                                                                                                                                    |                 |                     |      |                          |    |                                         |   |                                                          |   |           |





# ASIT ITALIA S.R.L.

Sede operativa e Uffici  
Via Quintino Sella, 6  
10020 Riva presso Chieri (TO)  
T (+39) 011 198 218 39 - F (+39) 011 198 371 06

[INFO@ASIT-GE.COM](mailto:INFO@ASIT-GE.COM)

[WWW.ASIT-GE.COM](http://WWW.ASIT-GE.COM)



Company with  
Certificate of Quality  
System ISO 9001:2015  
Cert n°38785/19/S