

FLOW SIGHT GLASS GAUGE

AI.FS Series



CE


DESCRIPTION

The flow meter sight glass gauge was designed with spring paddle to indicating flow rate for easy observation of flowing fluid from Left to Right or Right to Left direction.

TECHNICAL DATA

- **Service:** - Water treatment system
- - Industrial liquid flow system
- - Double window indication
- **Material:** Body: SS316; Paddle: SS316; Spring: SS316; Gauge: Tempered glass; Gasket: Teflon or Gore-Tex; Flange: SS316 and SS304 available
- **Max. Working Temperature:** 80°C
- **Max. Working Pressure:** 10 kg/cm² at 25°C water
- **Connection Size:** 2"
- **Connection Rating:** JIS 10K, ANSI 150#, PN10 and PN16 available

DIMENSIONS

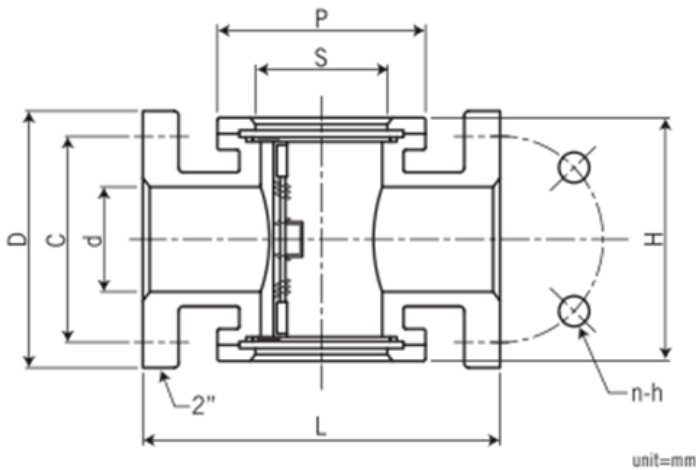


Size	Range (m ³ /h)	Dimensions							
		d	C	D	H	S	P	L	n-h
2"	2~10	48	120	155	170	102	149.5	220	19φ
	2~18	48	120	155	170	102	149.5	220	19φ

NOTE

1. Flange rating: JIS 10K, ANSI 150#, PN10 and PN16 are available.
2. The Dimensions of C, D will be changed by flange rating.

MOUNTING POSITION

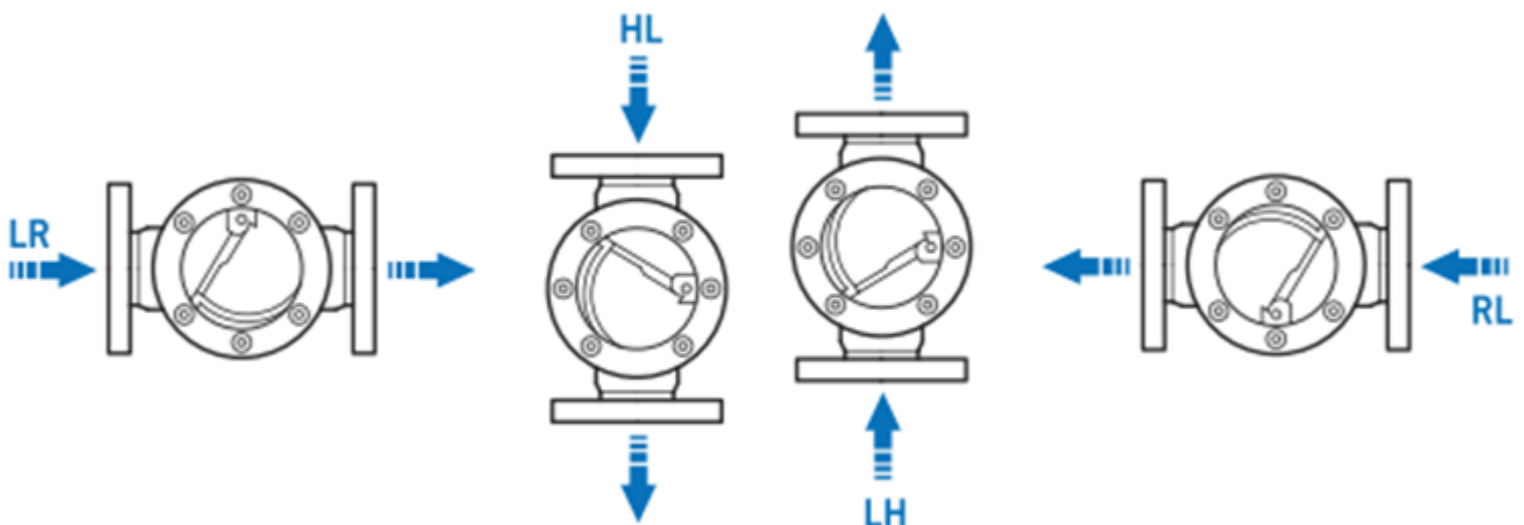

ORDERING INFORMATION

FS	Code	Body Material				
	1	SS316 (standard)				
		Code	Connection Size			
		1	2"			
		Code	Flange Rating			
			(1) JIS 10K (2) ANSI 150# (3) PN10 (4) PN16			
		Code	Flange Material			
		1	SS316	2	SS304	
		Code	Flow Range			
		A	2~10 M³/H	B	2~18 M³/H	
		Code	Flow Direction			
			LH	HL	RL	LR
FS						Complete Ordering Code



ASIT ITALIA S.R.L.

Sede operativa e Uffici

Via Quintino Sella, 6

10020 Riva presso Chieri (TO)

T (+39) 011 198 218 39 - F (+39) 011 198 371 06

INFO@ASIT-GE.COM

WWW.ASIT-GE.COM



Company with
Certificate of Quality
System ISO 9001:2015
Cert n°38785/19/S