

FLOW SIGHT GLASS GAUGE

AI.NAC



WITHOUT BALL

WITH BALL

EN[C €

DESCRIPTION


AI.NAC are used for mounting in small pipes for liquid fluids. The instruments are equipped with female threads at inlet and outlet and can be supplied with either brass fittings.

TECHNICAL DATA

- **Material:** Body: Brass and SS316 available; Tube Housing: Borosilicate Glass; O-Ring: Viton; Thread Connection: Brass; PTFE; Spring: SS316
- **Max. Pressure:** 10 bar
- **Max. Temperature:** 70°C
- **Connection Size:** 1/4", 3/8", 1/2" thread G(BSP) or NPT available, and option on request

DIMENSIONS


Without Ball

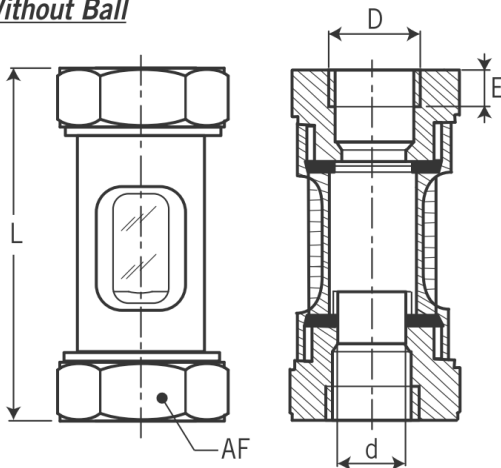

unit=mm

Size	L	AF	D	d	E	Weight (approx. kg)
1/4"	70	19	1/4"	5	12	0.085
3/8"	70	27	3/8"	8	12	0.17
1/2"	80	32	1/2"	12	15.5	0.28

With Ball

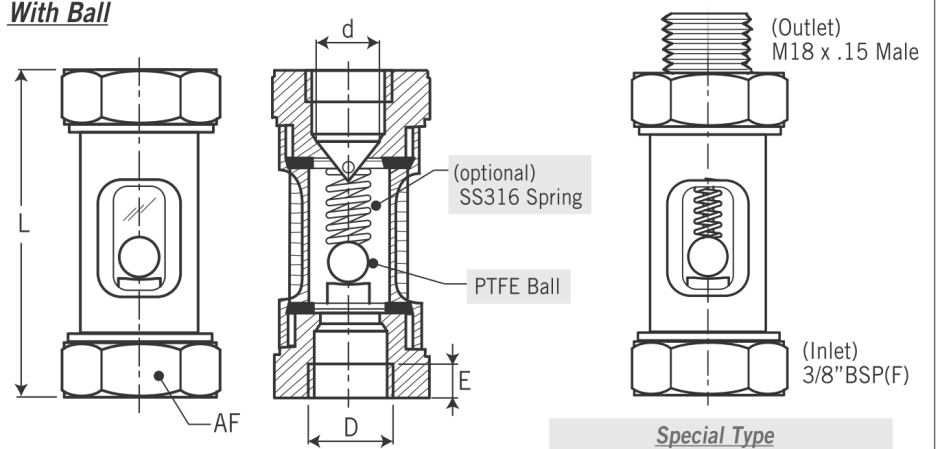

unit=mm


Size	L	AF	D	d	E	Weight (approx. kg)
3/8"	80	32	3/8"	8	12	0.31
1/2"	80	32	1/2"	8	15.5	0.31

Special Type

This special type is on request. Please consult with the manufacturer for this special type.

FLOW DIRECTION

Without Ball



Any flow direction available.

With Ball



Bottom to top direction only.

ORDERING INFORMATION

[illegible]



ASIT ITALIA S.R.L.

Sede operativa e Uffici
Via Quintino Sella, 6
10020 Riva presso Chieri (TO)
T (+39) 011 198 218 39 - F (+39) 011 198 371 06

INFO@ASIT-GE.COM

WWW.ASIT-GE.COM



Company with
Certificate of Quality
System ISO 9001:2015
Cert n°38785/19/S