

MANIFOLD A 3 VIE

GE.A3VMR

3 VALVE MANIFOLD— REMOTE MOUNTING

These manifold are generally used in a differential pressure application with Pressure gauges, Pressure switches & pressure transmitters. Two isolation valves & one equilizing valve is provide. The standard connections are 1/2" NPT in provided as an option.

STANDARD SPECIFICATIONS:

Maximum working pressure: 413 bar/ 6000PSI at 100°C


Material: 316 SS / 316L SS / 304 SS / Carbon Steel

Gland packing: PTFE/Graphite

Standard process connection: 1/2" NPT F

Standard instruments connection: 1/2" NPT F

Weight: 1.50 Kg

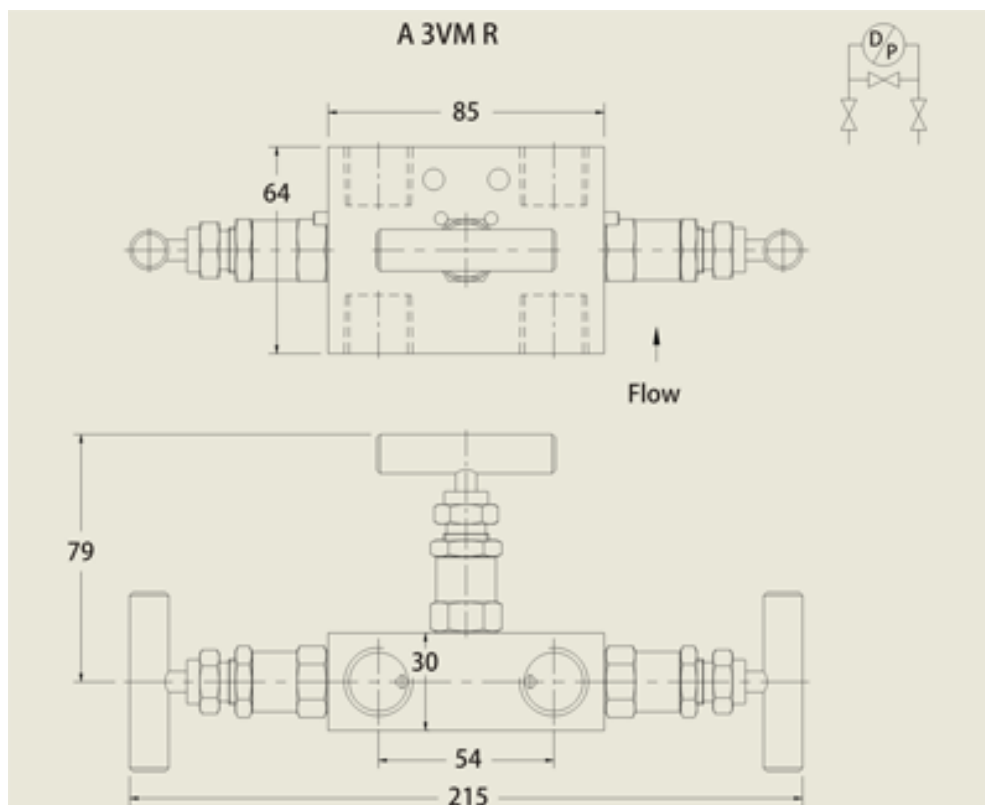

Le caratteristiche dichiarate possono cambiare senza alcun preavviso



Per ordini:
Tel.: +39 011 198 218 39
E-mail: commerciale@asit-ge.com



ASIT ITALIA S.r.l.

Sede operativa e Uffici

Via Quintino Sella, 6 - 10020 Riva presso Chieri (TO)

T +39 011 198 218 39 - F +39 011 198 371 06

<http://www.asit-ge.com> - info@asit-ge.com

